




TELECRANE®

Lee's Hi-Tech Ent. Co., Ltd.

F24 Industrial Radio Remote Controller

Reliable - High Performance - Economic

- Durable nylon-fiber housing for extra shock resistance
- Low power consumption with 2 AA batteries (last up to 2 months in normal operation)
- Operating range up to 100 meters
- Programmable function setting through Windows-based software
- Economic efficiency, ease of operation
- Pre-wiring standard cable making wiring procedures easier
- 100% compatible components reducing stock of spare part
- Safety features: 4.3 billion unique ID code
Hamming code
Enhanced watch-dog circuit

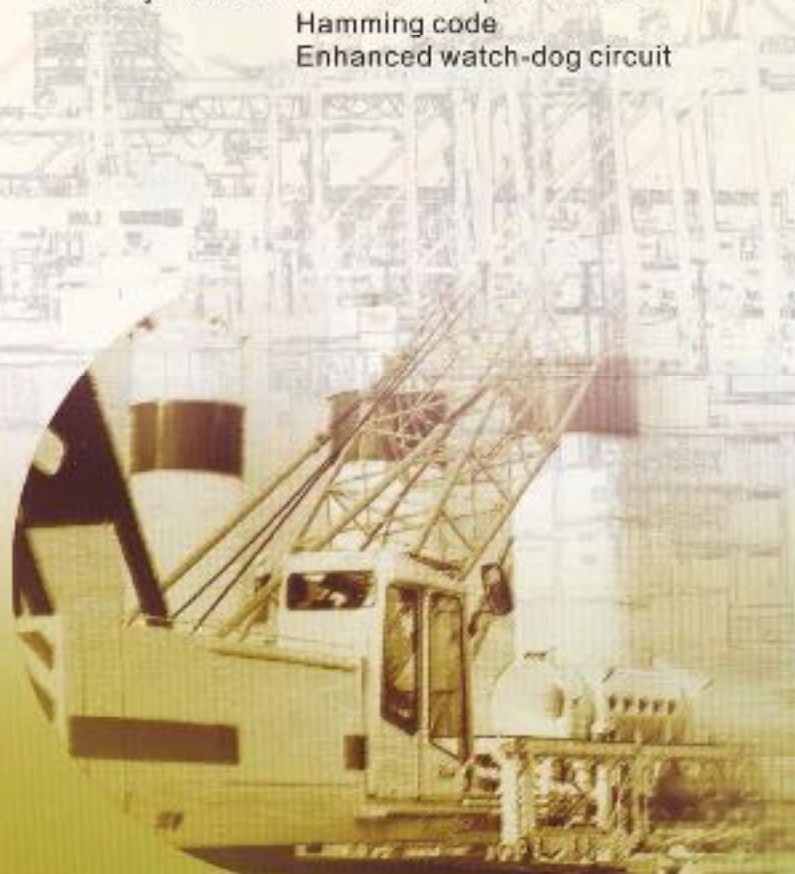

**Radio Control System best for
Crane/mobile/forestry application/lift equipment**

● **F24-8 Series**

- 8 Single/double step button
- 1 Emergency button
- 1 Start pushbutton
- 1 Rotary key switch



● **F24-10 Series**

- 10 Single/double step button
- 1 Emergency button
- 1 Start pushbutton
- 1 Rotary key switch



● **F24 Receiver**



Optional Accessories

Operating Temp.	-35°C ~ +80°C
Maximum range	100 M
TX power supply	2 AA size Alkaline batteries
RX power supply	AC 48/110/220/380 V DC 12-24 V
Protection class	IP 65 Industrial standard
ID Code	4.3 billion (32 bit)
Hamming Distance	≥ 4
TX Dimension & Weight	186 x 61 x 51 mm Apprx. 255g (w/o batteries)
RX Dimension & Weight	200x162x107mm Apprx. 1220g (w/o cable)

Optional Accessories



· CD Software & Program Cable



· Copter



· Passive Antenna



· Transmitter Protective Cover

Other TELECRANE[®] radio series



- *6/12 single/double step pushbuttons and 5 step double joystick type
- *PLL Synthesizer radio frequency control



- *2/4/6 single/double step pushbuttons
- *AC power supply is suitable for small crane/chain hoist
- *Also available with DC power supply (12-24VDC) suitable for mobile application

Itahydraulic
Power Technology

www.telecrane.com.au
P.O.Box 455 South Hurstville
NSW 2221 Australia
tel. 02 95708202
email. info@telecrane.com.au