

TECHNICAL DATA SHEET Item

AWG109

 Revision no.: **1**

 Filter media:

 Filter area: cm² Sq. inch

 Efficiency: μm (c) at β= in accordance to ISO 16889

 μm (c) at β= in accordance to ISO 16889

 Dirt holding capacity in accordance to ISO 16889 at final Dp 5 bar gr. ISO MTD

 Collapse pressure in accordance to ISO 2941: Bar. Psi.

 Max working pressure as per NFPA T2.6.1: Bar. Psi.

 Burst pressure as per NFPA T2.6.1: Bar. Psi.

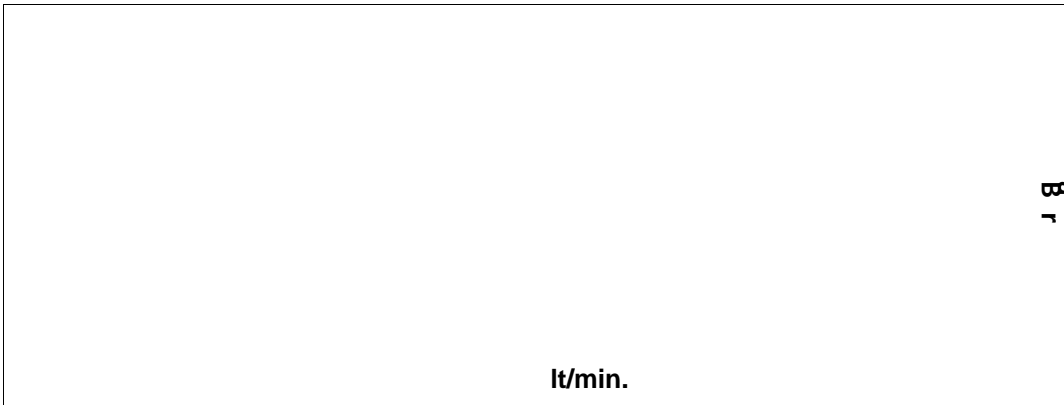
 By-pass valve: By-pass setting: Bar. Psi.

 Operating temperature: min °C max °C

 Flow: Seal:

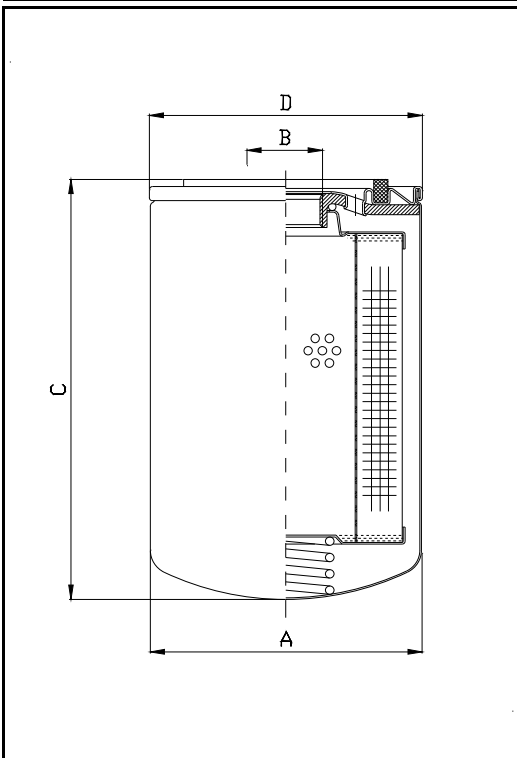
 Fluid compatibility :

 Notes :

 Pressure drop charts in accordance to ISO 3968 (Class B) at clean element 30 cst viscosity 0,86 Kg/dm³ density mineral oil.

 Q: lt/min.

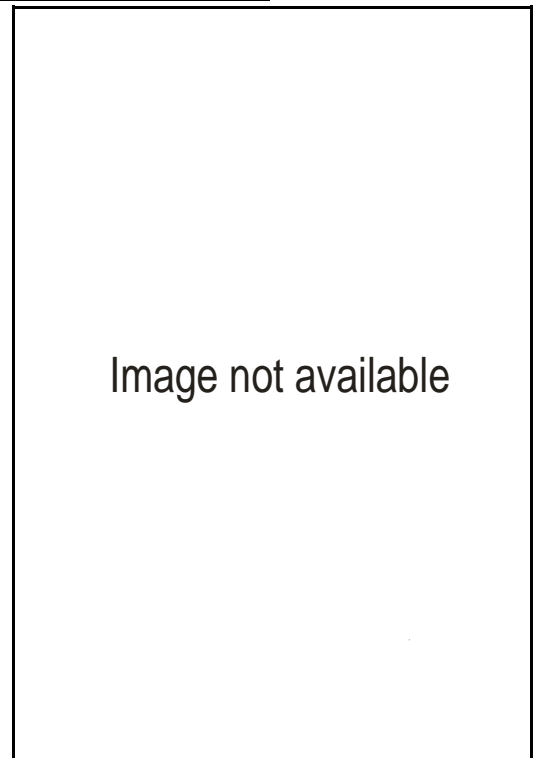
 Dp: Bar.

 Q: GPM

 Dp: PSI


- mm**
- A
 - B
 - C
 - D
 - E
 - F

- inch**
- A
 - B
 - C
 - D
 - E
 - F



Technical drawing not in scale

Image is only representative