

TECHNICAL DATA SHEET Item

DMD0030E10B

 Revision no.:

Filter media:
Filter area: *cm*² *Sq. inch*
Efficiency: μm (c) at $\beta=$ *in accordance to ISO 16889*
 μm (c) at $\beta=$ *in accordance to ISO 16889*
Dirt holding capacity in accordance to ISO 16889 at final Dp 5 bar *gr. ISO MTD*
Collapse pressure in accordance to ISO 2941: *Bar.* *Psi.*

By-pass valve: **By-pass setting:** *Bar.* *Psi.*


Operating temperature: *min* $^{\circ}\text{C}$ *max* $^{\circ}\text{C}$

Flow: **Seal:**

Fluid compatibility :

Notes :

Pressure drop charts in accordance to ISO 3968 (Class B) at clean element 30 cst viscosity 0,86 Kg/dm³ density mineral oil.

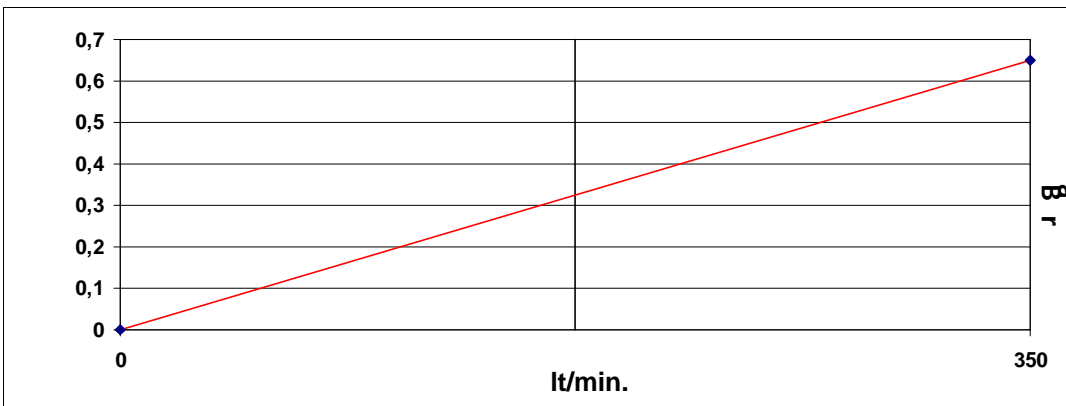


Q: *lt/min.*

Dp: *Bar.*

Q: *GPM*

Dp: *PSI*

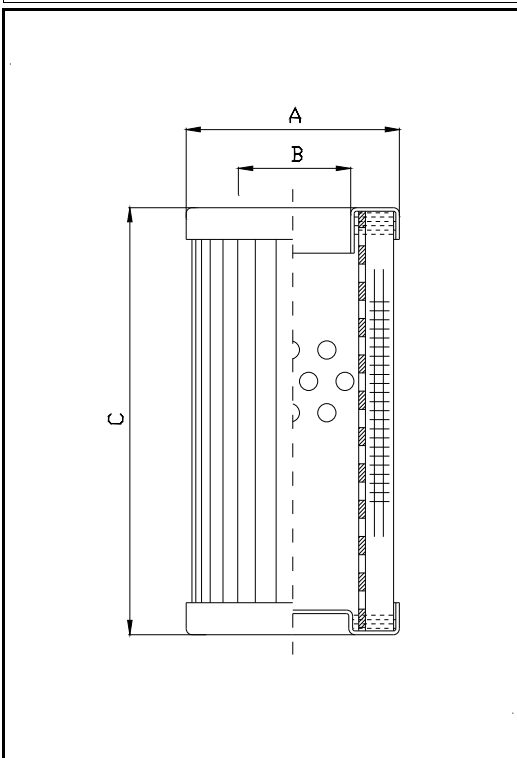

mm

A
B
C
D
E
F

inch

A
B
C
D
E
F



Technical drawing not in scale

Image is only representative