

·SPECIFICATIONS

SD-14series

Nom.Pressure (MPa)	Max.Pressure (MPa)	Nom.Flow rate (L/min)	Max.Flow rate (L/min)	Back Pressure (MPa)	Hydraulic Oil		
					Tem.range (°C)	Visc.range (mm²/S)	Filtrating Accuracy (mm²/S)
20	25	120	120	≤1	-20~+80	10~400	≤10


PRODUCTION INTRODUCTION

Product Name	Hydraulic Monoblock Control Valves
Product Item	SD-14 Series
Brand	
Spools Range	1 Levers
Working Pressure	20-25MPa
Temperature	-20°C~+80°C
Spool Actuation	manual,pneumatic control,electric and pneumatic control.hvdraulic and electric control.remote control




·MODEL CODE

SD-14 series

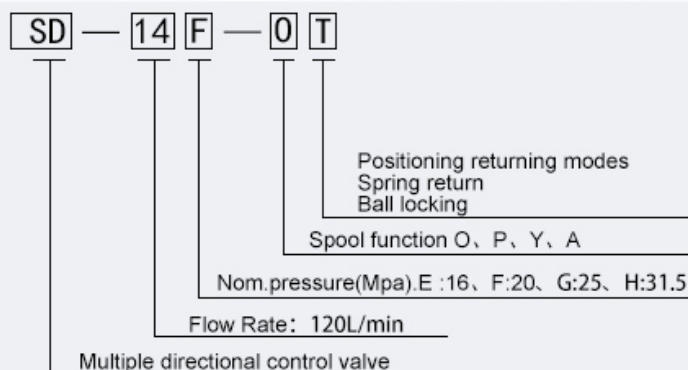


·DRAWINGS

SD-14 series

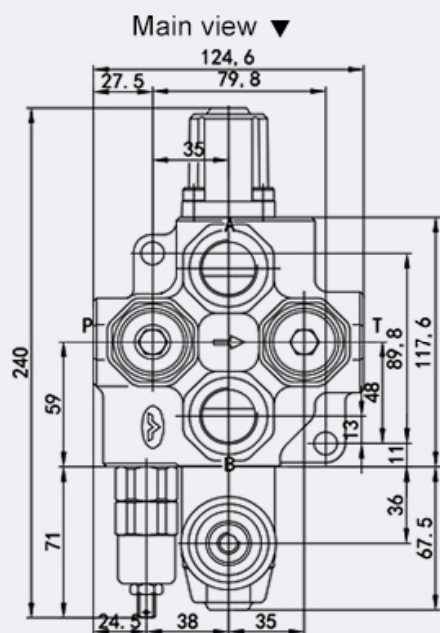

Valve construction: monoblock construction, 1levers.

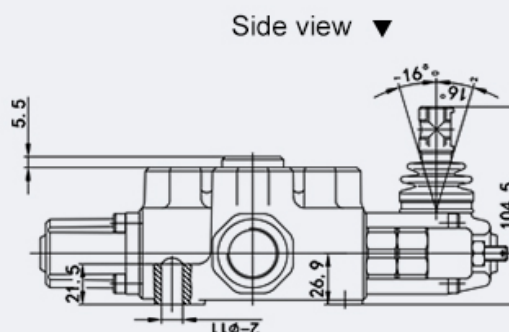

- Specification:
- 1.Working Pressure:20MPa.
 - 2.Flow rate:120L/min.
 - 3.Spring return.
 - 4.Cylinder Spool.

